




China 6205 Bearing Supplier

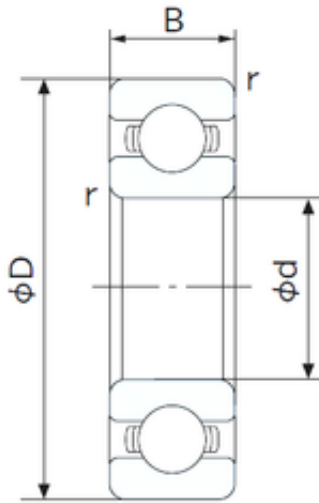

NSK NTN KOYO NACHI Deep Groove Ball Bearing 16016 ZZ 2RS for Motorcycles

Bearing No. 16016

16016 Bearing 2D drawings and 3D CAD models

Size	80x125x14 mm
Bore Diameter	80 mm
Outer Diameter	125 mm
Width	14 mm
d	80 mm
D	125 mm
B	14 mm
C	14 mm
r min.	0.6 mm
da min.	87 mm
Da max.	118 mm
ra max.	0.6 mm
Weight	0.597 Kg
Basic dynamic load rating (C)	32 kN
Basic static load rating (C0)	29,6 kN
(Grease) Lubrication Speed	5300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NACHI
Minimum Buy Quantity	N/A
Weight / Kilogram	0.599
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling	No



China 6205 Bearing Supplier

Slot	
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	80MM Bore; 125MM Outside Diameter; 14MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.nachi.com
Manufacturer Item Number	16016 //P0/006
Weight / LBS	1.32
Bore	3.15 Inch 80 Millimeter
Outer Race Width	0.551 Inch 14 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
Bore Type	Cylindrical Bore
Configuration	Single Row
Bore Size	80 mm
Width	14 mm
Fillet Radius/Chamfer	0.6 mm
Dynamic Load Rating	32,000 N
Static Load Rating	29,600 N
Limiting Speed - Grease	5,300 rpm
Limiting Speed - Oil	6,300 rpm
Factor fo	16.4



China 6205 Bearing Supplier

Radial Clearance	0.010 to 0.030 mm
da (min)	87 mm
Da (max)	118 mm
ra (max)	0.6 mm